


6' TO 10' SIDEWALK

STREET NAME SIGN LOCATION DETAILS NO SCALE


NOTES:

- 1. TWO STREET NAME SIGNS LOCATED DIAGONALLY ACROSS FROM EACH OTHER ARE REQUIRED WHERE ONE OF THE TWO INTERSECTING STREETS' WIDTH (CURB TO CURB) IS 64' OR MORE.
- 2. ONLY ONE STREET NAME SIGN IS REQUIRED IF BOTH INTERSECTING STREETS' WIDTHS (CURB TO CURB) ARE LESS THAN 64'.
- 3. PRIVATE STREET NAME SIGN SHALL BE WHITE LETTERING ON BROWN BACKGROUND AND SHALL BE PLACED OUTSIDE PUBLIC ROW.

DATE:

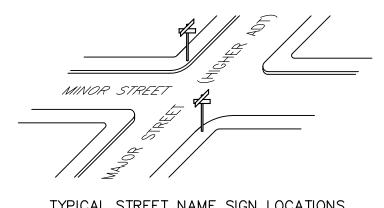

TYPICAL STREET NAME SIGN LOCATIONS NO SCALE

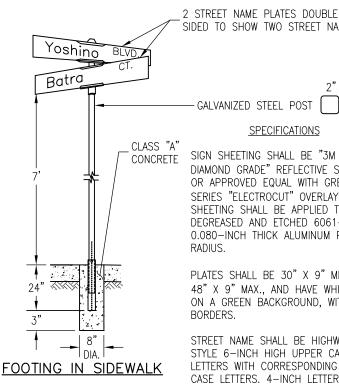

33'

3"

SIDED TO SHOW TWO STREET NAMES GALVANIZED STEEL POST

SPECIFICATIONS

SIGN SHEETING SHALL BE "3M WHITE VIP DIAMOND GRADE" REFLECTIVE SHEETING OR APPROVED EQUAL WITH GREEN 1170 SERIES "ELECTROCUT" OVERLAY FILM. SHEETING SHALL BE APPLIED TO DEGREASED AND ETCHED 6061-T6, 0.080-INCH THICK ALUMINUM PLATE WITH

PLATES SHALL BE 30" X 9" MIN. OR 48" X 9" MAX., AND HAVE WHITE LETTERS ON A GREEN BACKGROUND, WITHOUT BORDERS.

STREET NAME SHALL BE HIGHWAY GOTHIC STYLE 6-INCH HIGH UPPER CASE LETTERS WITH CORRESPONDING LOWER CASE LETTERS. 4-INCH LETTERS SHALL BE USED FOR "AVE., BLVD., CT., DR., PL., RD., ST." "LANE" AND "WAY" SHALL NOT BE ABBREVIATED.

ASSEMBLY HARDWARE SHALL BE "WESTERN HIGHWAY PRODUCTS" (WHP) NO. (812F/ 12" FOR FLAT BLADES) OR NO. (812F-90% CROSSPIECE FOR FLAT BLADES) OR APPROVED EQUAL.

2" X 2" GALVANIZED STEEL POST SHALL BE INSTALLED WITH WHP "ANCHOR-MATE" SIGN POST SUPPORT ANCHOR OR APPROVED EQUAL.

STREET NAME SIGN NO SCALE

CLASS "A"

CONCRETE



DRAWN BY: M. LEE CHECKED BY: D. PITTON APPROVED BY: T. SUPAN

DECEMBER 2006

STREET NAME SIGN AND LOCATION

DIA.

FOOTING IN DIRT

CITY OF SANTA CLARA

PAGE: 38